


FS 6.26

TECHNICAL SHEET



Model		FS6.26
Dimensions		
[A] Height *	mm	1.955
[B] Width	mm	1.920
[C] Track	mm	1.580
[D] Ground clearance *	mm	220
[E] Front overhang	mm	1.075
[F] Pitch	mm	2.525
[G] Rear overhang	mm	520
[H] Length without tow hook	mm	4.120
[I] Length with tow hook	mm	4.230
[L] Cab width	mm	960
Weights		
Maximum unladen weight	kg	4.850
Drawbar pull *	daN	3.610
Loading system		
Lifting capacity	kg	2.600
Lifting capacity at max. reach	kg	900
Lifting height	m	5,8
Max horizontal arm extension	m	3,2
Arm extension at max height	m	0,4
Extracting sections	n.	1
Swinging Angle	°	155
Tyres		
Standard		12-16,5"
Turning radius *	m	3,25

* Values refer to 12-16,5" tires supplied as standard. Whith other tyre sizes, these values change accordingly.

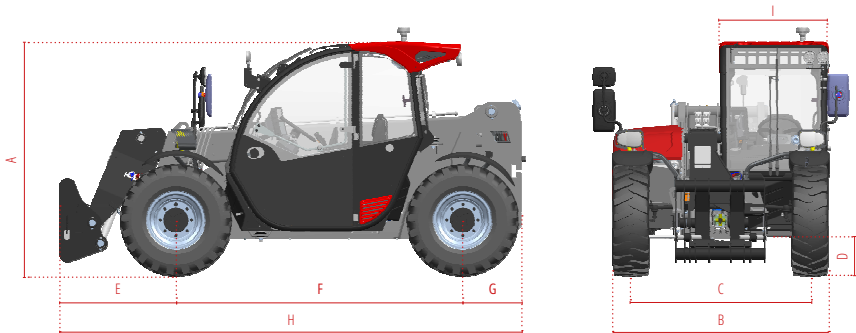

Model	FS 6.26		
Engine			
Brand	Yanmar		
Emissions	Stage V		
Number of cylinders	4		
Displacement	cc	3.300	
Power	kW/hp	51,7 / 69,3	
Max. torque	235 Nm @ 1.600 rpm		
Post-treatment system	DOC + DPF		
Radiator fan	mechanical		
Transmission			
Type	hydrostatic		
Distributor	flow sharing		
Gears	single gear		
Speed	km/h	30	
Hydraulics			
Pump type	gears		
Hydraulic flow-rate	l/bar	80/210	
Elettro-proportional joystick	electro hydraulic		
Tank capacity			
Fuel tank	l	80	
Hydraulic oil tank	l	70	
Service brake			
Drive	servo hydraulic		
Type	multi-disc in oil bath		
Number of discs per axle	6 in the front axle		
Parking brake			
Drive	negative SAHR type		
Type	multi-disc in oil bath		
Axles			
Aront axles	limited slip 45%		
Rear axles	open type differential		
Steering mode	2RS / 4RS / Crab		

