

FS 7.32 COMPACT

TECHNICAL SHEET



FS 7.32 COMPACT

TECHNICAL FEATURES

Models		7.32C
Dimensions		
[A] Height	mm	2250
[B] Width	mm	2100
[C] Track	mm	1670
[D] Ground clearance	mm	330
[E] Front overhang	mm	1075
[F] Pitch	mm	2950
[G] Rear overhang	mm	640
[H] Length without tow hook	mm	4670
[I] Length with tow hook	mm	4820
[L] Cab width	mm	960
Width with stabilizers	mm	-
Height model lc (low cab)	mm	2060
Loading system		
Lifting capacity	kg	3200
Lifting height	m	7,1
Max horizontal boom extension	m	3,6
Boom extension at max height	m	0,3
Number of extracting sections	n.	1
Swinging Angle	°	155
Tank capacity		
Fuel tank	l	120
Adblue tank	l	10
Hydraulic oil tank	l	90
Fuel tank model lc (low cab)	l	110
Connection equipment		
Fh		●
FH Heavy		-
Euro		○
Other		
Telematics farmatics		○
Frame lateral levelling 10°		-
Front stabilizers		-
Rear axle swing block		-
Bucket mode		●



Models		7.32C
Maximum unladen weight		
Classic 55	kg	6.350
Classic 75	kg	6.400
Dynamic 85	kg	6.400
Performance 85	kg	6.550
Excellence 85	kg	6.600

Models		7.32C
Drawbar pull		
Classic 55	daN	4.330
Classic 75	daN	4.330
Dynamic 85	daN	4.330
Performance 85	daN	7.000
Excellence 85	daN	7.000

Models		7.32C
Tyres		
Turning radius	m	3,8
400/70 - 20"		●
400/70 - 24"		○*
460/70-R24" LIFT PRO OFFSET +29		○
460/70-R24" XMCL OFFSET +29		○
18 - 19.5 MPT-06 OFFSET +40		○

● Standard ○ Optional - Not available

* Standard for the Performance and Excellence configurations.

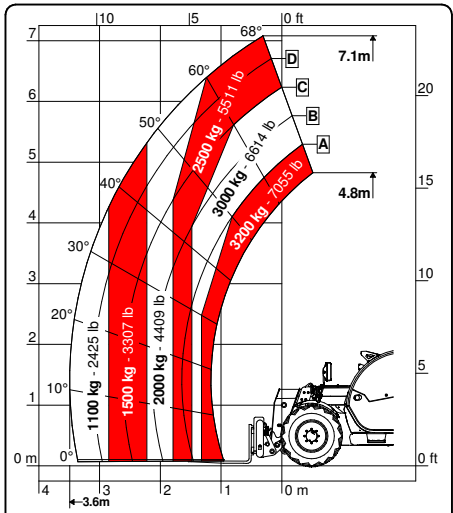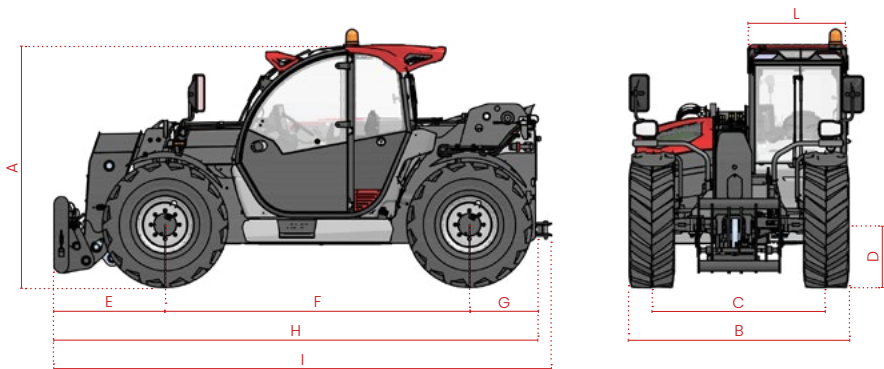

7.32C

FS 7.32 COMPACT

CONFIGURATIONS

Configurations		Classic 55	Classic 75	Dynamic 85	Performance 85	Excellence 85
Engine						
Deutz 55,4/75	STAGE V kW/hp	●	-	-	-	-
Deutz 75/102	STAGE IIIA STAGE V kW/hp	-	●	-	-	-
Deutz 85/115	STAGE IIIA STAGE V kW/hp	-	-	●	●	●
Deutz 100/136	STAGE V kW/hp	-	-	-	-	○
Engine water preheating		○	○	○	○	○
Post-treatment system		DOC/DPF	DOC/DPF + SCR	DOC/DPF + SCR	DOC/DPF + SCR	DOC/DPF + SCR
Radiator fan		proportional	proportional	proportional	proportional + reversible	proportional + reversible
Hydraulics						
Pump type		gears	gears	gears	LS piston	LS piston
Hydraulic flow-rate	l/bar	100/250	100/250	120/250	150/250	170/250
Flow sharing distributor		●	●	●	●	●
Electro-proportional joystick		hydraulic	hydraulic	hydraulic	hydraulic	CAN-BUS
Quick release		○	○	○	○	●
Boom suspension		○	○	○	○	○
Floating boom		○	○	○	○	●
Lifting valve		-	-	-	Ecofast	Ecofast-E
Manual 6-way diverter valve		○	○	○	○	●
Constant front flow		●	●	●	●	●
Creeper		●	●	●	●	●
Boom Electric Socket (PEB)		○	○	○	○	○
Boom function						
Height limiter		-	-	-	-	●
Electronic boom speed control		Full BSC	Full BSC	Full BSC	Full BSC	Full + Single BSC
Autoretract		-	-	-	-	●
Controlled boom retraction		●	●	●	●	●
Bucket shaking		-	-	-	-	●
Transmission						
Hydrostatic single gear 30 km/h		●	●	●	-	-
Hydrostatic two mechanical gears 40 km/h		-	-	-	●	●
Axles						
45% limited slip self-locking differential front axles		●	●	●	●	●
Open type differential rear axles		●	●	●	●	●
100% differential lock rear axles		-	-	-	●	●
Brakes						
Service brake		Multi-disc in oil bath				
Parking brake		Multi-disc in oil bath with negative drive type SAHR				
Pneumatic / hydraulic trailer brake		-	-	○	○	○
Lights						
LED front lights		○	○	○	○	●
LED rear lights		●	●	●	●	●
LED front and rear work lights		○	○	○	●	●
LED boom work lights		○	○	○	○	○
Step courtesy light		○	○	○	●	●
Trailer lights rear socket		○	○	●	●	●
Cabin						
Cabin		Standard	Standard	Standard	Standard	Comfort Plus
Protection grille for windscreen		○	○	○	○	○
Touch colour display	"	5	5	5	5	7
Start and stop system		●	●	●	●	●
Internal rear-view mirror		○	○	○	●	●
Air conditioning		○	○	○	○	●
Other						
Tow hook		○	○	●	●	●

● Standard ○ Optional - Not available

TELEHANDLERS **NEXT GENERATION**

**FARESIN INDUSTRIES SPA
HEADQUARTERS**

Via dell'Artigianato, 36
36042 Breganze (Vicenza), Italy
Tel. + 39 0445 800300
faresin@faresin.com

FARESIN DEUTSCHLAND GMBH

Steinach B.R. - an der
Frankenhoehe 1
91605 Gallmersgarten, Germany
Tel. +49 9843 9802828
lager@faresin.de

**FARESIN DEUTSCHLAND
NORD GMBH**

Wissmannstr, 59
27755 Delmenhorst, Germany
Tel. +49 4221 800 989-0
info@faresin-nord.de

FARESIN POLAND SP. Z O.O.

ul. Borowiacka 9
87-100 Torun, Polska
Tel. +48 503 147 811
poland@faresin.com

**FARESIN INDUSTRIES
FRANCE**

2 Rue de l'Avenir 14460
Colombelles, France
Tel + 33 2 31 82 79 61
france@faresin.com

It brings to the attention of all potential customers, all recipients, and to the maximum extent possible, external interlocutors, that Faresin Industries S.p.A. adopts a general Disclaimer regarding the description of the technical and functional characteristics of its machineries, as well as the manner of their use, also with regard to their safety. The Disclaimer must be understood as having a general scope, and therefore Faresin Industries s.p.a. invites to know it, also by accessing the website: faresin.com

FARESIN.COM



01.2025